

Tie Down Kit Assembly Instructions

Attach the strap with the buckle to the top rail.

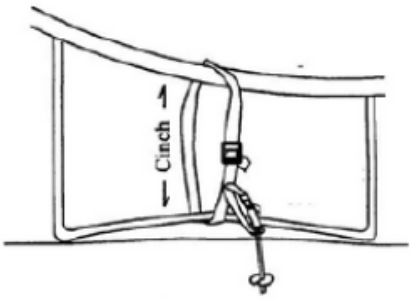

Screw the anchor stake into the ground in a clockwise direction. Continue until only the “eye” of the anchor protrudes above the ground.



Connect the end of the strap through the eye of the anchor and then feed the end of this strap through the slit in the buckle. Adjust the strap so that it is taut to complete installation.

